

High Efficiency Joint

HEJ 70-48-60

30 V – 60 V | 62 Nm | 22 rad/s

This is a highly compact, integrated and efficient robotic drive system that contains all subsystems to provide a full motion solution, such as controller, motor, gearing and sensing. This drive is fully enclosed, ingress- and impact-rated, and designed for continuous operation and active thermal cooling if necessary. It offers high robustness and a long operating lifetime. Controlled via *EtherCAT*, it features an advanced impedance controller, rendering it suitable for modern robotics applications. Simulation models enable dependable robotic system designs.


EtherCAT

All data are provided for $U_{DC} = 48\text{ V}$ and $T_{amb} = 25^\circ\text{C}$, unless otherwise specified.

Specifications for different voltage levels or other operating limits, and corresponding simulation models, are available upon request.

OUTPUT CHARACTERISTICS

Maximum joint velocity	$U_{DC} = 48\text{ V}$	+/- 17.8 rad/s
	$U_{DC} = 60\text{ V}$	+/- 22 rad/s
Maximum joint torque, actively controlled & repetitive <small>This torque can be applied for a few seconds (e.g., approx. 1s - 3s). The duration and intervals are thermally limited.</small>	+/- 62 Nm	
Nominal joint torque <small>This torque can be maintained indefinitely without external forced air cooling. Conditions: Actuator mounted in free space (to allow convective cooling), and with a joint velocity of 2 rad/s.</small>	+/- 27 Nm	

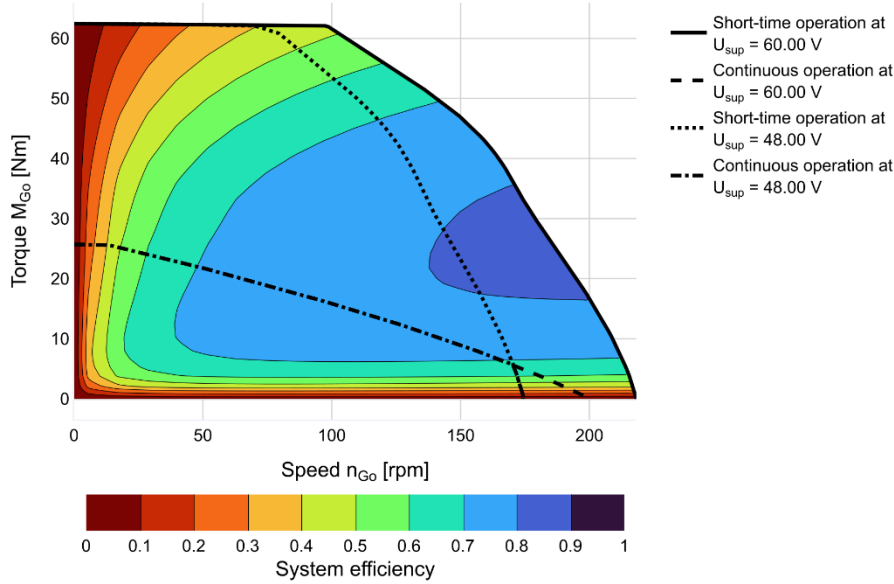
POWER CONVERSION CHARACTERISTICS Motor Operating Quadrants

U_{DC} (V) DC-Link Voltage	V_{joint} (rad/s) Joint Velocity	M_{joint} (Nm) Joint Torque	I_{in} (A) DC-Link Input Curr.	P_{loss} (W) Total System Loss	Efficiency (%) $P_{out,mech} / P_{in,elec}$	
48	0	0	0.04	2.0	0	●
48	0	60	6.5	392	0	▲
48	0	50	3.1	184	0	▲
48	0	40	1.5	90	0	▲
48	0	30	0.8	48	0	●
48	0	20	0.4	22	0	●
48	0	10	0.1	7	0	●
48	10	0	0.3	19	0	●
48	10	50	13.3	297	63	▲
48	10	20	4.3	57	78	▲
48	15	0	0.5	30	0	●
48	15	30	8.8	106	80	▲
48	15	20	6.2	75	80	▲
48	15	10	3.3	47	76	●
48	15	0	0.7	44	0	●
60	20	0	0.7	44	0	●
60	20	10	4.4	64	76	▲

Operating points with a triangle (▲) can only be maintained for short times (some seconds, due to thermal limitations (mainly: continuous input current limited to 8 A_{RMS})).

Operating points marked with a circle (●) can be maintained continuously, but potentially require adequate external forced air cooling.

Simulation models are available upon request.

POWER CONVERSION PERFORMANCE MAP Motor Operating Quadrants


Note: This graphic shows the maximum achievable joint torque/velocities for the given supply voltages. Refer to the *Power Conversion Characteristics* table above for details about the continuous operating points. Further details are available on request.

Highest efficiency, motor quadrant: ca. 81.4%

ELECTRICAL CHARACTERISTICS

Operating input voltage range (voltages as low as 20V are possible but might have implications – contact us.)	30 V – 60 V
Max. allowable transient input voltage (e.g., due to inductive spikes or noise on the supply bus)	67.0 V
DC link input capacitance (MLCC)	240 μF
Max. power supply input current During transients or accelerations, the system can create high current peaks. Capacitive inrush current not considered. Unloaded joint.	< 40 A
Max. continuous power supply current Input currents may only exceed this value for very short periods of time to prevent damage to the power connector or internal cabling. This is a conservative limit – please approach us if you plan on exceeding this limit.	8.0 A _{RMS}

CONTROL CHARACTERISTICS

Control modes	Joint position, velocity, torque, motor current (FOC) Joint impedance controller (simultaneous control of position, velocity, torque) PDO-mappable control gains Internal cogging, friction and backlash compensation systems
Joint position sensor	Resolution: 14 bit. Absolute angular error: < 0.01 rad (0.6°) Note that the firmware applies sensor fusion techniques to reduce noise and INL error on this encoder signal. This sensor measures the absolute output position (after the gear).
Joint torque measurement Via electric motor current, compensated	Absolute error, steady-state: < 0.8 Nm
Joint velocity filtering	Configurable lowpass
Controller execution rate	Current controller (FOC): 25 kHz All others: 2.5 kHz PWM frequency: 50 kHz
Max. EtherCAT communication rate	1 kHz
Internal temperature sensors	Motor winding and power electronics, PDO-mappable
Motor temperature i2t protection	Configurable
Mechanical backlash Fixed motor position, movement of the joint. A low-backlash design is available upon request.	0.5° (average) Depending on the selected control topology, operating regime and gains, the inherent internal mechanical backlash can potentially affect the controller performance.
Tot. mech. moment of inertia, at joint	112 kgcm ²
Backdriving torque (system disabled, including joint seal friction)	< 1.0 Nm
Acceleration time	<TBD> ms Time it takes to accelerate the joint from standstill to its maximum velocity.

ENVIRONMENTAL CHARACTERISTICS

Ingress protection	IP67, also with rotating joint and applied bending moments
Ambient operating temperature	-20°C to +60°C (might require adequate cooling if the system exhibits losses)
Thermal interface Note: The thermal dissipation capability serves only as an indication. Actual performance depends on external heat transfer system and environment. Details are available upon request.	Integrated heat sinks for forced air cooling. Continuous thermal dissipation (passive convective cooling) up to ca. 50 W. Integrated and user-controllable fan power supply.
Thermal resistance winding-housing	0.38 K/W
Thermal time constant winding	12 s

LIFETIME CHARACTERISTICS

Note: A high emphasis was put on creating a highly reliable and robust product. Nonetheless, the operating lifetime of this drive strongly depends on its load cases and environmental aspects. The indicated values are only a (simplified) guideline. Further details are available upon request.

High-cycle fatigue: Joint impact/collision events	12e6 impacts at 38 Nm 100e3 impacts at 50 Nm 1e3 impacts at 67 Nm
Lifetime at constant operation Note 1: Depending on environmental factors (e.g., temperature, dust or chemicals exposure), the joint output seal may potentially degrade earlier. Note 2: These operating points are naturally dependent on temperature and specific aspects of the load cycle and gear lubrication life. Details can be provided upon request.	10 Nm, 22 rad/s: >56'000 h 30 Nm, 5 rad/s: >56'000 h

MECHANICAL CHARACTERISTICS

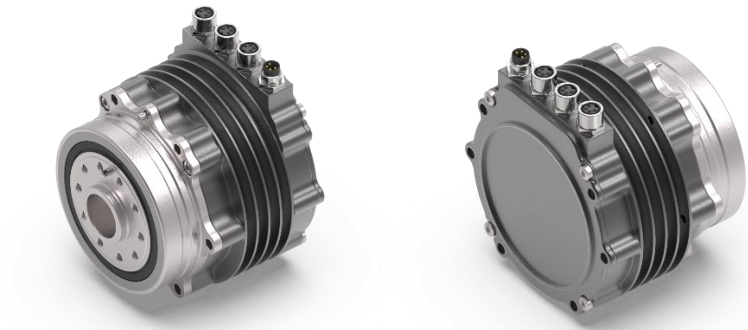
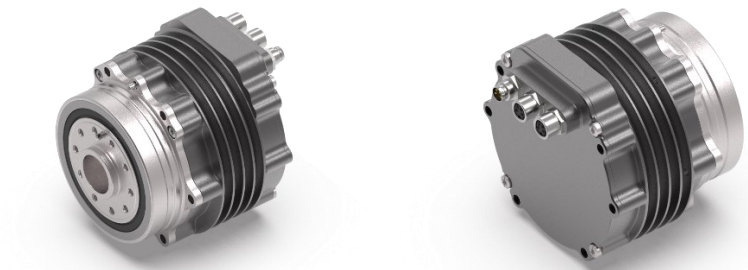
Axial length, overall, excluding connectors	ca. 77 mm
Diameter, excluding connectors	ca. 88 mm
Mass	ca. 1.05 kg
Max. joint axial, radial and bending loads, dynamic Note 1: The system provides an integrated cross-roller bearing. Note 2: These load cases can be complex. Higher loads can be possible. Contact us for assistance. Note 3: These loads assume mounting at the front interface.	600 N, axial or radial, 1e6 cycles. 900 N, axial or radial, 1e2 cycles. 80 Nm, bending, 1e6 cycles. 120 Nm, bending, 1e2 cycles.

ELECTRICAL INTERFACES

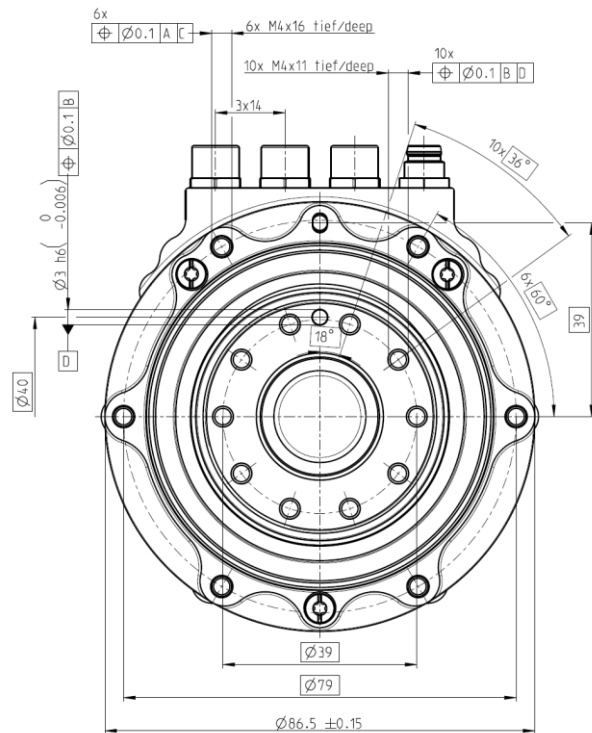
Connectors: (Up to) 4x M8	1x Power supply, 2x EtherCAT (allows daisy-chaining of several systems), 1x fan power and control (radial connector version only).
EtherCAT	Full Duplex, 100 Mbit/s
Functional safety	Under development. Please contact us for details.
Grounding concept	All housing parts connected to DC link GND via RC network. EtherCAT shield connected directly to housing.
Fan power and control To supply an external cooling fan.	Power: 12 V, max. 700 mA. Control: PWM (Open Drain, 25 kHz). Tacho input: Pull-up, 10 kΩ.

SYSTEM CONFIGURATIONS

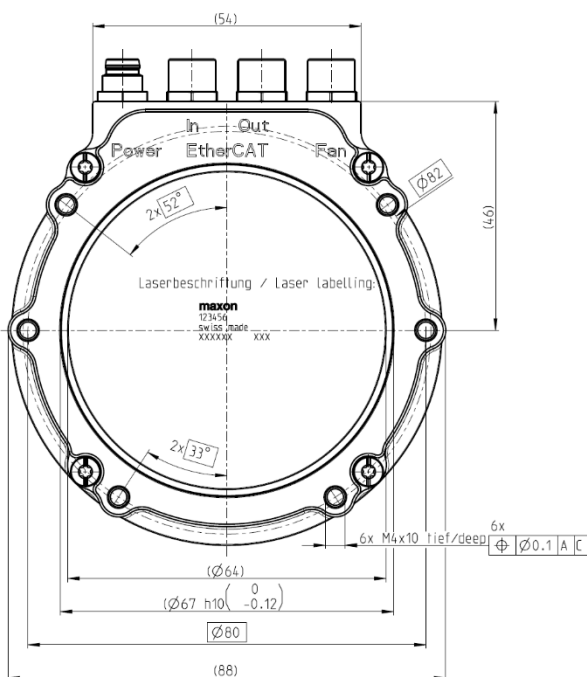
We offer two connector arrangements of the *HEJ 70-48-60* to facilitate cable management and maximize systems integration possibilities.
All performance data is identical for the two versions.
Please refer to the mechanical drawings and electrical pinouts below to assess the key differences.
CAD models and detailed integration drawings are available on request.

Radial connectors	maxon P/N: 933846 
Axial connectors	maxon P/N: 933847 



Technical drawing of a mechanical part, likely a valve or actuator, showing a side view and a cross-sectional view. The side view includes dimensions for overall length (55 max.), mounting flange diameter (53.5 ± 0.3), and various internal features like a central shaft (4 ± 0.5), a central bore (16.8), and a central nut (1.2 max.). The cross-sectional view shows a central shaft (4 ± 0.5) and a central bore (16.8). The drawing also includes a table of dimensions for the mounting flange, with columns for 'A' and 'B' and rows for 'C' and 'D'. The table shows dimensions for the mounting flange, including a central bore (16.8) and a central nut (1.2 max.). The drawing is labeled with 'A' and 'B' for the mounting flange and 'C' and 'D' for the central shaft and bore.





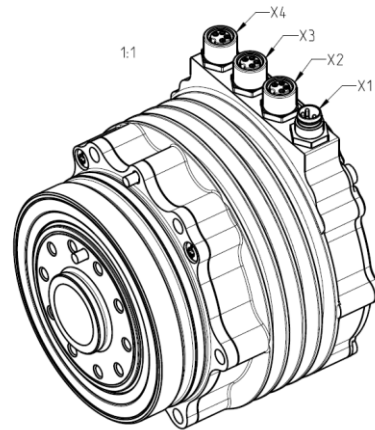
Note 2: The HEJ 70 can also be mounted solely at its rear interface (6x M4x10 fasteners). Please contact us at robotics@maxongroup.com to assess your load case (force transmission, housing integrity, high-cycle fatigue).



ELECTRICAL PINOUTS – RADIAL CONNECTORS (P/N 933846, REV 01)

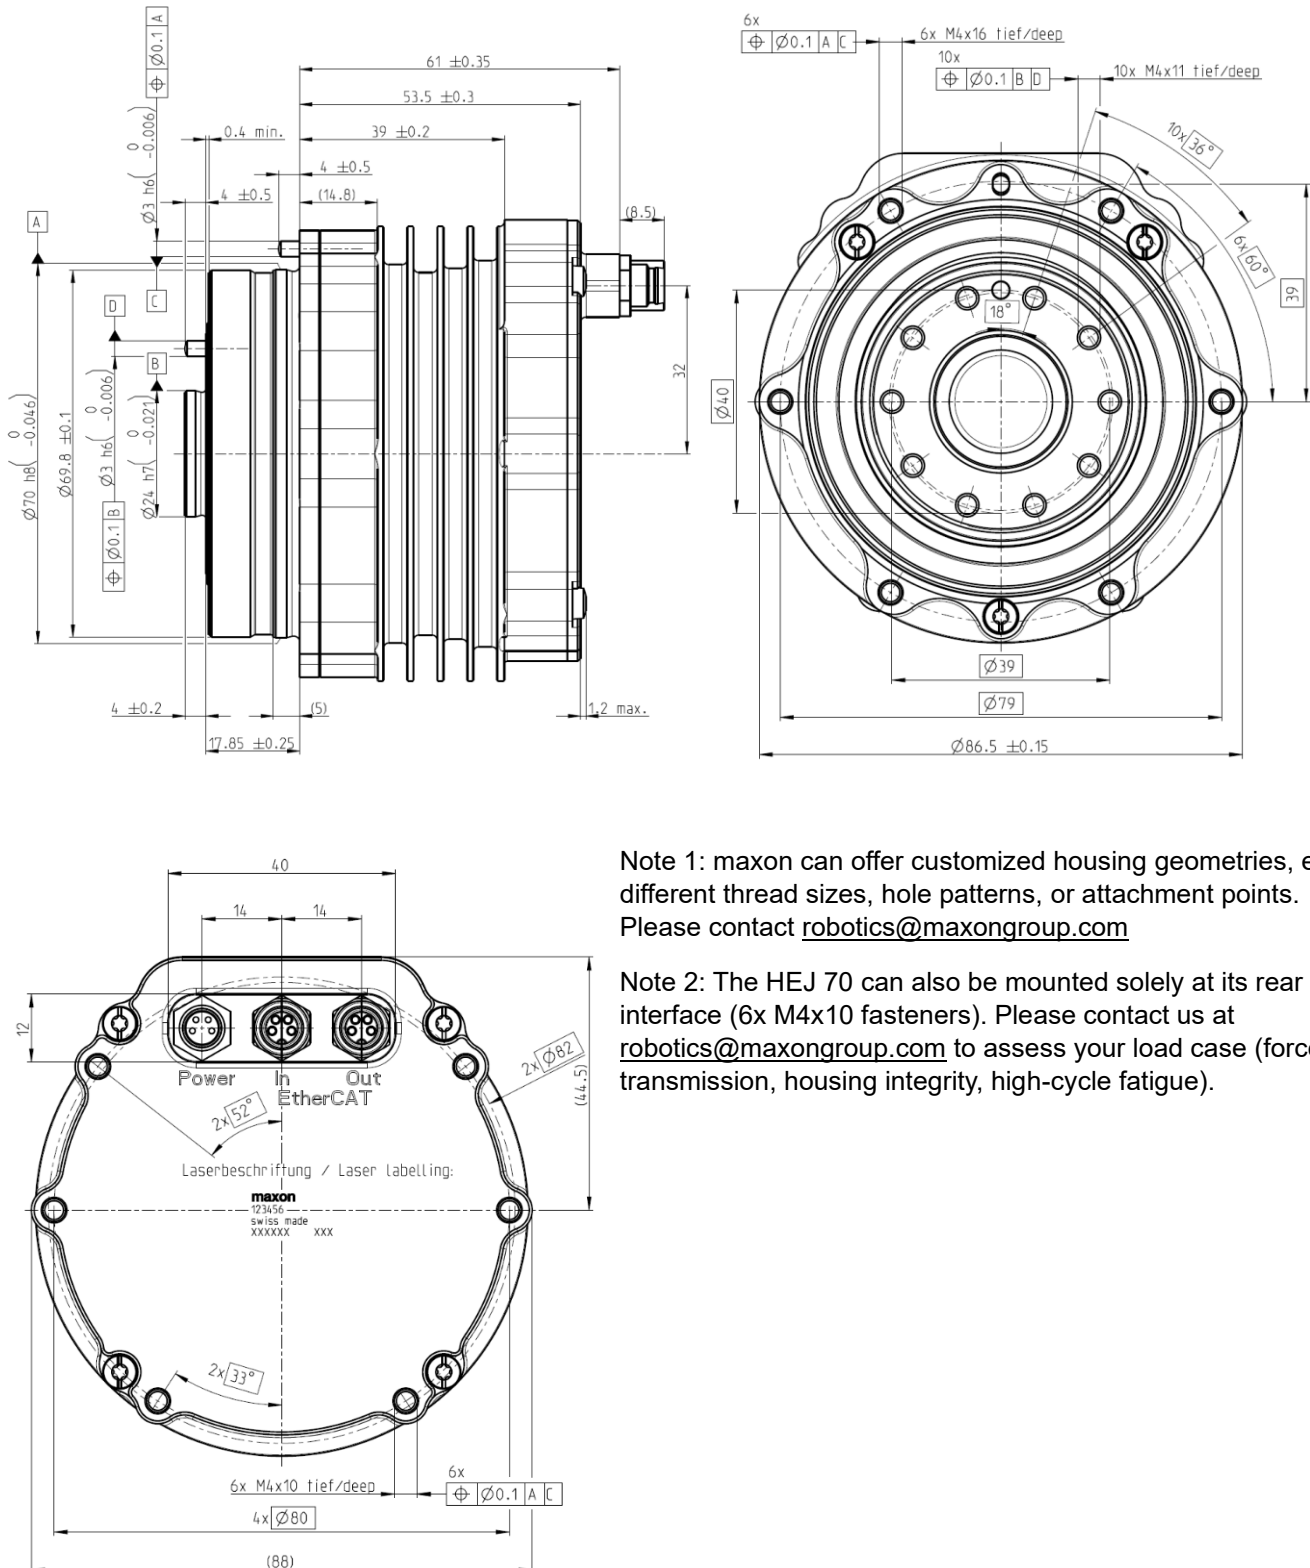
Steckerbelegung / PIN allocation		
Stecker/connector	PIN	Signal
X1 Power M8 male, 4poles, A-coded 	1	VBUS
	2	VBUS
	3	GND
	4	GND
X2 EtherCAT In M8 female, 4poles, A-coded 	1	TX+
	2	RX+
	3	RX-
	4	TX-

Steckerbelegung / PIN allocation		
Stecker/connector	PIN	Signal
X3 EtherCAT Out M8 female, 4poles, A-coded 	1	TX+
	2	RX+
	3	RX-
	4	TX-
X4 Fan M8 female, 4poles, A-coded 	1	Vcc 12V
	2	GND
	3	PWM-Fan
	4	Tacho-Fan


Please note:

- Due to technical limitations and design decisions, the mounting orientation (rotation) of the four connectors X1-X4 is arbitrary and cannot be changed (rotated). This means that the keys of these connectors can point in any direction. Do not use right-angled cables/connectors. Refer to the axial connector version of this unit (see below).
- maxon can offer customized connectors or cabling solutions. Please contact robotics@maxongroup.com



MECHANICAL DRAWINGS – AXIAL CONNECTORS (P/N 933847, REV 01)




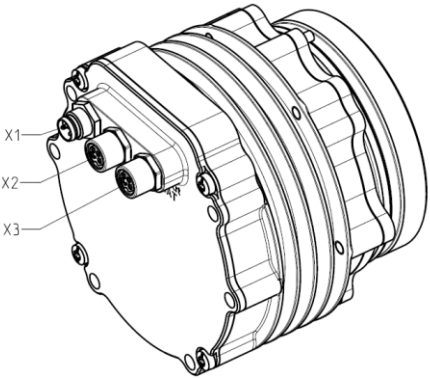
Note 1: maxon can offer customized housing geometries, e.g., different thread sizes, hole patterns, or attachment points. Please contact robotics@maxongroup.com

Note 2: The HEJ 70 can also be mounted solely at its rear interface (6x M4x10 fasteners). Please contact us at robotics@maxongroup.com to assess your load case (force transmission, housing integrity, high-cycle fatigue).

ELECTRICAL PINOUTS – AXIAL CONNECTORS (P/N 933847, REV 01)

Steckerbelegung / PIN allocation		
Stecker/connector	PIN	Signal
X1 Power M8 male, 4poles, A-coded 	1	VBUS
	2	VBUS
	3	GND
	4	GND
X2 EtherCAT In M8 female, 4poles, A-coded 	1	TX+
	2	RX+
	3	RX-
	4	TX-

Steckerbelegung / PIN allocation		
Stecker/connector	PIN	Signal
X3 EtherCAT Out M8 female, 4poles, A-coded 	1	TX+
	2	RX+
	3	RX-
	4	TX-



Please note:

- 1) Due to technical limitations and design decisions, the mounting orientation (rotation) of the four connectors X1-X4 is arbitrary and cannot be changed (rotated). This means that the keys of these connectors can point in any direction. Do not use right-angled cables/connectors. Refer to the radial connector version of this unit (see above).
- 2) maxon can offer customized connectors or cabling solutions. Please contact robotics@maxongroup.com